



Mat / Réactions 5,5 m x 5,5 m

Maste /
Eckdrücke





Masts /
Reactions

Mástil /
Reacciones

Torre / Reazioni


Tramo /
Reacções

MDK 1

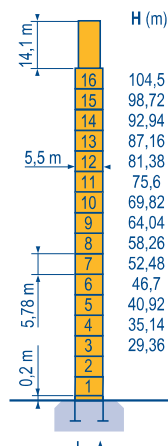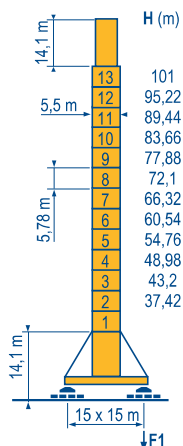

Autres implantations
Aufstellmöglichkeiten
Mounting possibilities
Otras implantaciones
Altre postazioni
Outras implantações

MDK 1

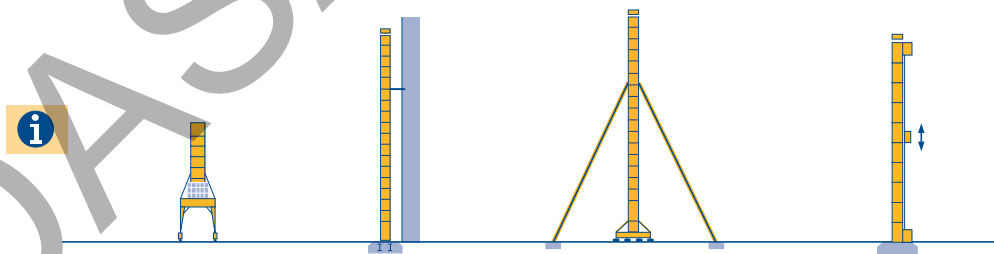

MD 3200

POTAIN

F	D	GB	E	I	P
● Réactions en service	● Reaktionskräfte in Betrieb	● Reactions in service	● Reacciones en servicio	● Reazioni in servizio	● Reacções em serviço
■ Réactions hors service	■ Reaktionskräfte außer Betrieb	■ Reactions out of service	■ Reacciones fuera de servicio	■ Reazioni fuori servizio	■ Reacções fora de serviço
A vide sans lest (ni train de transport) avec flèche et hauteur maximum.	Ohne Last, Ballast (und Transportachse), mit Maximalausleger und Maximalhöhe.	Without load, ballast (or transport axles), with maximum jib and maximum height.	Sin carga, sin lastre, (ni tren de transporte), flecha y altura máxima.	A vuoto, senza zavorra (né assali di trasporto) con braccio massimo e altezza massima.	Sem carga (nem trem de transporte)- sem lastro com lança e altura máximas.
Nous consulter	Auf Anfrage	Consult us	Consultarnos	Consultateci	Consultar-nos

RADASANAT.COM

(0098) - 9121834995

Courbes de charges

Lastkurven


Load diagrams

Curvas de cargas

Curve di carico

Curva de cargas

MCK 1

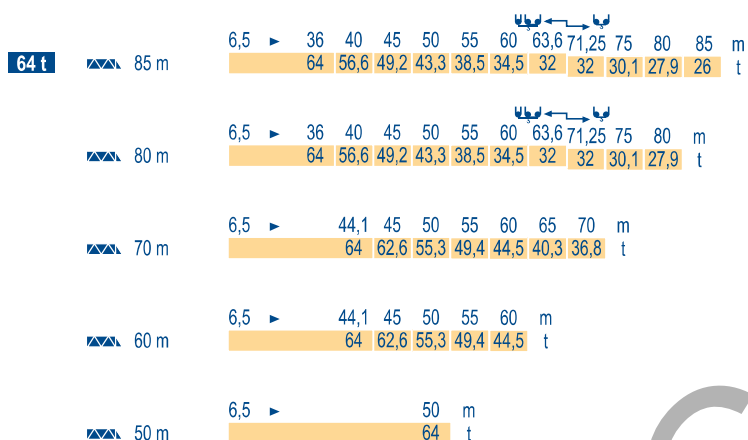

Mécanismes

Antriebe

Mechanisms

Mecanismos

Meccanismi

Mecanismos

MCK 2

64 t											ch - PS hp	kW					
	500 LCC 160	m/min	60	→	82	→	120	30	→	41	→	60	500	370	610 m		
		t	32		21		5,4	64		42		10,8					
	800 LCC 160	m/min	92	→	126	→	160	46	→	63	→	80	785	560	610 m		
		t	32		21		5,4	64		42		10,8					
	25 DVF 33	m/min	0 → 25 (64 t) - 0 → 50 (32 t)										25	18,5			
	RVF	tr/min U/min rpm	0 → 0,6										6x 25	6 x 18			
80 t											ch - PS hp	kW					
	250 LCC 133	m/min	15	→	18	→	22,5	→	30	10	→	12	→	15	→	20	610 m
		t	53,3		39,8		26,5		13,3	80		60		40		20	
	25 DVF 33	m/min	0 → 50										25	18,5			
	RVF	tr/min U/min rpm	0 → 0,6										6x 15	6 x 11			
 100 t - 120 t - 160 t																	
 KA 1050		RTVF	m/min	0 → 17										16 x 7	16 x 5,2		
CEI 38  IEC 38			kVA														
400 V (+6% -10%) 50 Hz			250 LCC : 315 kVA 500 LCC : 515 kVA 800 LCC : 800 kVA														

MD 3200



F	D	GB	E	I	P
Levage	Heben	Hoisting	Elevación	Sollevamento	Elevação
Distribution	Katzfahren	Trolleying	Distribución	Distribuzione	Distribuição
Orientation	Schwenken	Slewing	Orientación	Rotazione	Rotação
Translation	Kranfahren	Travelling	Traslación	Traslazione	Translação



Document commercial non contractuel. Pour toute information technique se référer à la notice correspondante.

Unverbindliches Vertriebsdokument. Für technische Informationen, siehe die entsprechenden Anweisungen.

This commercial document is not legally binding. For any technical information, please refer to the corresponding instructions.

Documento commercial no contractual. Para cualquier información técnica, ver la noticia correspondiente.

Documento commerciale non vincolante, per tutte le informazioni tecniche fare riferimento al catalogo istruzioni.

Documento comercial não contratual. Para qualquer informação técnica complementar consultar as respectivas instruções.



Manitowoc Crane Group



Americas

Tel : +1 888 479 7278
Tel : +1 717 593 2000

Europe – Middle East – Africa

Tel : +33 (0) 4 72 81 50 00
Tel : +44 (0) 191 522 2000

Asia – Pacific

Tel : +65 6264 1188
Fax : +65 6862 4040

www.manitowoccrane.com

18, rue de Charbonnières - B.P.173
69132 ECULLY Cedex - France

Tél. : +33 (0) 4 72 18 20 20
Fax. : +33 (0) 4 72 18 20 00
www.manitowoccrane.com

MD 3200

Réf. 2004 52 MCK 3

Copyright.Reproduction interdite © POTAIN 2004

Réalisation Sedoc